
Remote sensing indices and their applications

Dr. Poonam Tripathi
Training Analyst, Capacity Building
ICIMOD

Training of Trainers on the applications of remote sensing and GIS for Afghanistan 9-13 March, 2020

Electromagnetic spectrum (EMR)

From very short Gamma rays to very long radio waves

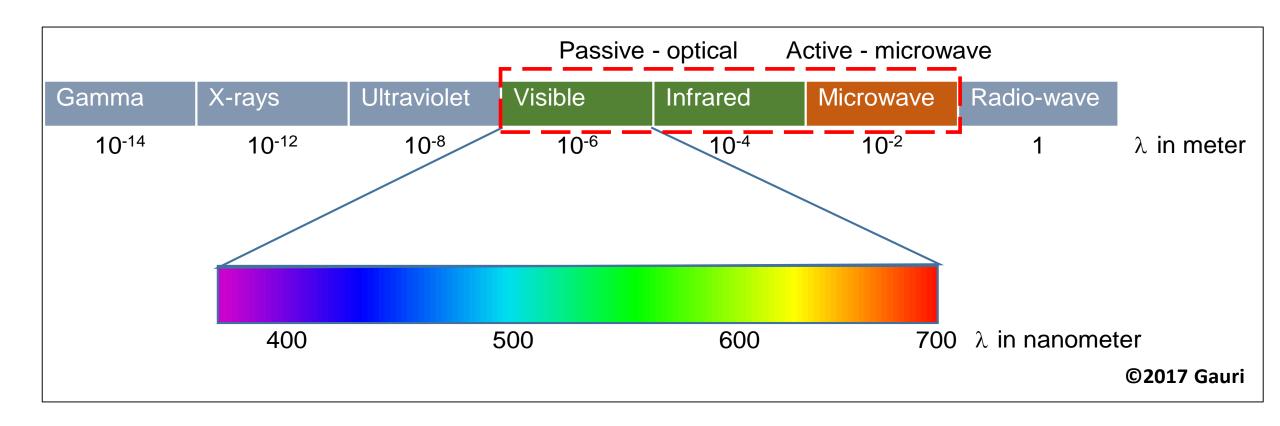

Blue (400 – 500), Green (500 – 600) and Red (600 – 700nm) bands

Features in Sentinel-2A satellite bands

Kabul region of Afghanistan B3 (Green) B2 (Blue) Google Earth B4 (Red) **B8 (NIR)** B9 (SWIR)

	Band	Spectral /wavelength range (nm)	Objective	Spatial range (m)
B1	Coastal aerosol	433-453	Aerosol correction	60
B2	Blue	458-523	Aerosol correction, land measurement	10
В3	Green	543-578	Land measurement	10
B4	Red	650-680	Land measurement	10
B5	Red edge1 (RE1)	698-713	Land measurement	20
B6	Red edge2 (RE2)	733-748	Land measurement	20
B7	Red edge3 (RE3)	773-793	Land measurement	20
B8	Near infra red	785-900	Water vapour correction, Land measurement	10
B8a	Near infrared narrow	855-875	Water vapour correction, Land measurement	20
В9	Water vapour	935-955	Water vapour correction	60
B10	Shortwave infrared	1360-1390	Cirrus detection	60
B11	Shortwave infrared 1	1565-1655	Land measurement	20
B12	Shortwave infrared 2	2100-2280	Aerosol correction, land measurement	20


Features in Landsat satellite bands


	Band	Spectral range (nm)	Objective	Spatial range (m)
B1	New deep blue	433-453	Aerosol/coastal zone	30
B2	Blue	450-515	Pigments/coastal/scatter	30
B3	Green	525-600	Pigments/coastal	30
B4	Red	630-680	Pigments/coastal	30
B5	Near infra red	845-885	Foliage/coastal	30
B6	Shortwave infrared 2	1560-1660	Foliage	30
B7	Shortwave infrared 3	2100-2300	Mineral/litter/no scatter	30
B8	Panchromatic	500-680	Image sharpening	15
B9	Shortwave infrared	1360-1390	Cirrus cloud detection	30

- 1. https://www.sentinel-hub.com/develop/documentation/eo_products/Sentinel2EOproducts
- 2. https://modis.gsfc.nasa.gov/about/specifications.php
- 3. https://gisgeography.com/landsat-8-bands-combinations/

Differences between Landsat and Sentinel data

	Landsat-8-OLI	Sentinel-2A	
Bands	9	13	
Spectral range (µm)	0.435-1.384	0.44-2.22	
Spatial resolution (m)	30	10,20,60	
Temporal resolution	16 days	10 days	
	Operational Land	Multi-Spectral	
Sensor	Imager (OLI)	Instrument (MSI)	
Type	Multi-spectral	Multi-spectral	
Satellite	Landsat-8	Sentinel-2A	
Operator	U.S. Geological Survey (USGS)	European Space Agency (ESA)	

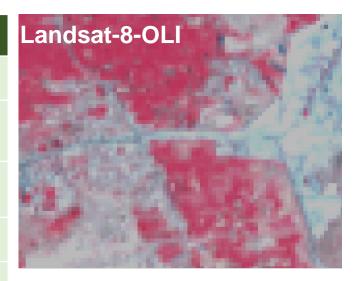





- ➤ Undesirable effects on recorded radiances (e.g. variable illumination) caused by variation in topography
- ➤ Differences in **brightness values** from identical surface material or vice versa are caused by topographic slope and aspect, shadows or seasonal changes
- ➤ These hamper the ability of interpreter to correctly identify surface material in image
- Ratio transformation can be used to reduce the effects of such environmental conditions



Google Earth

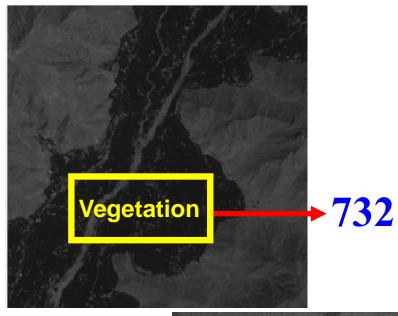


Spectral response and reflectance is similar from two different objects in RED band of Sentinel-2A

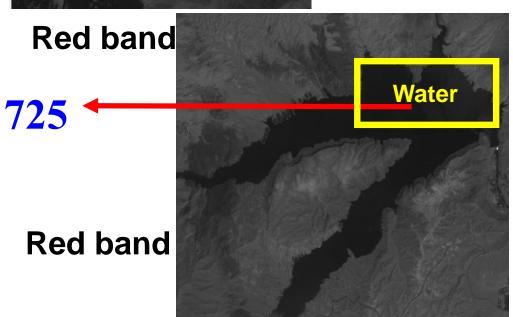

Google Earth






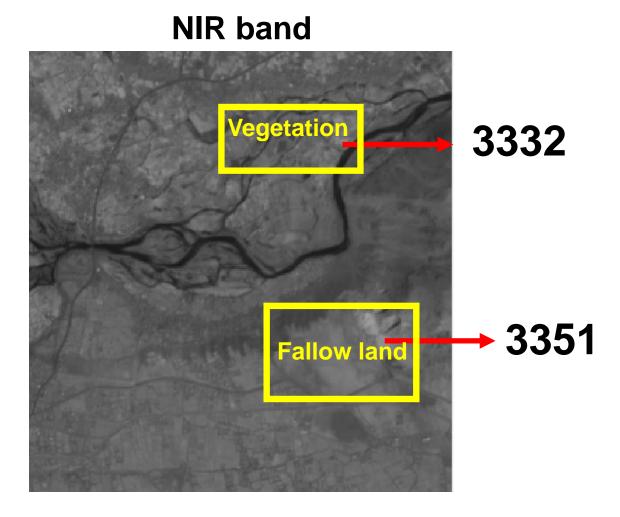

Spectral signature of two different objects are similar in NEAR-INFRA RED band of Sentinel




NIR band

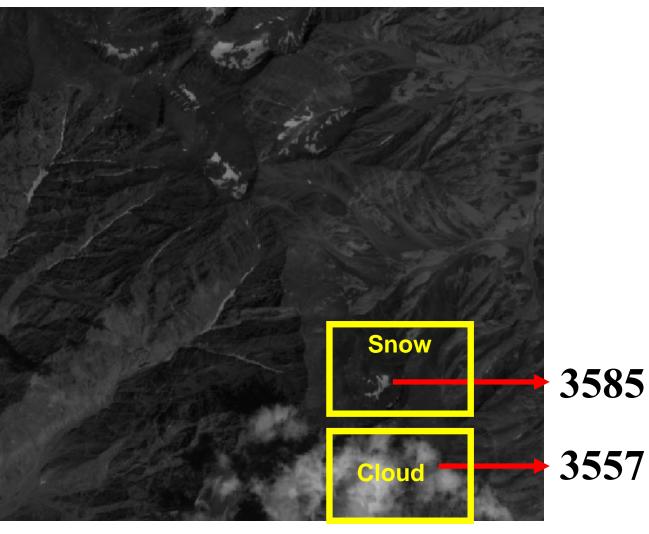

Spectral signature of two different objects are similar in NEAR-INFRA RED band

- Specific target has an individual and characteristic manner of interacting with incident radiation
- Interaction are described by the spectral response of the target in a particular wavelength of EMR

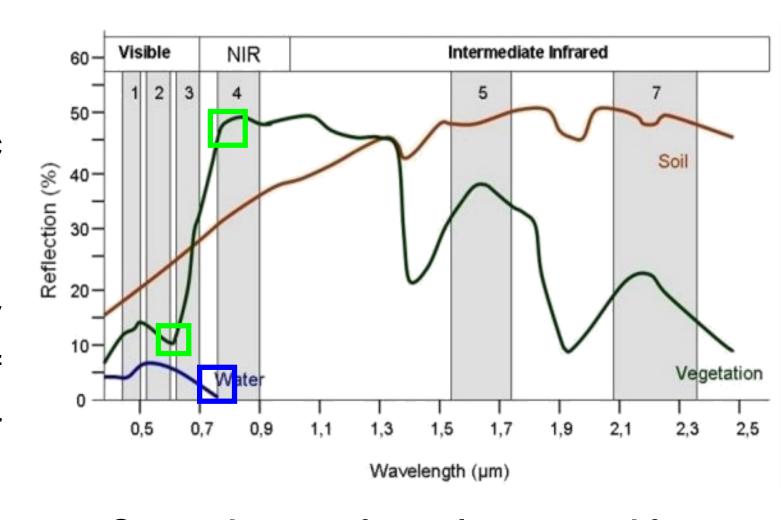


Spectral curves for various natural features

Differences between histogram

Histogram of Red and near-infrared reflectance representing more pixel frequency at higher reflectance in NIR of Sentinel-2A data









GEE B4 (Red)

B6 (NIR)

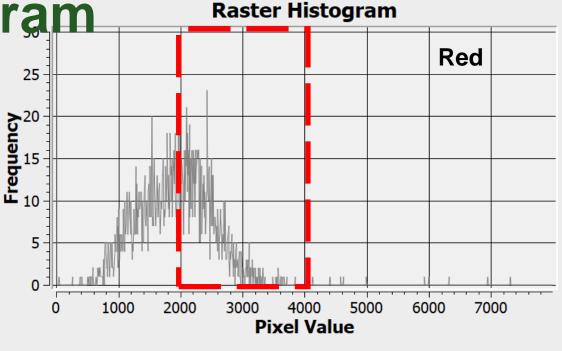

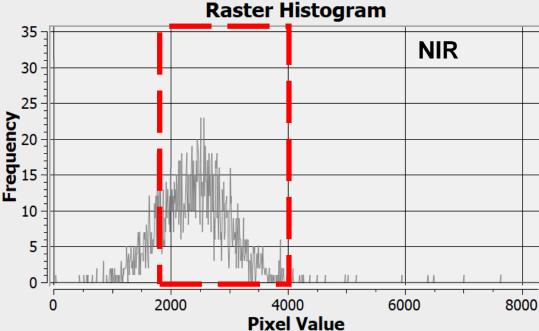

Spectral indices

- 1. Spectral indices help in modelling, predicting, or infer surface processes
- 2. Developed to assess and monitor several land change processes
- 3. Computed from multiband images by adding and subtracting bands thereby making various band ratio
- 4. Emphasizes a specific phenomenon that is present, while mitigating other factors
- Vegetation health and status
- Burned area
- Fire severity etc.

Development of spectral indices

- 1. Initially intrinsic indices were developed from simple band ratios, which highlighted the spectral properties of vegetation at different stages of growth and senescence.
- 2. To compensate for background effects such as that caused in areas in which the soil response dominates over the vegetation.
- 3. To compensate for the effects of atmospheric distortion.
- 4. Development of new spectral indices to applications other than vegetation health. These include indices for burned area assessment and fire severity etc.

The criterion of a spectral index

- •Maximize the sensitivity of certain surface feature (e.g. plant biophysical properties). Ideally, such responses should change linearly to allow both ease of scaling and use over a wide range of surface conditions.
- •Normalize or reduce effects due to sun angle, viewing angle, the atmosphere, topography, instrument noise, etc., to allow consistent spatial and temporal comparisons
- •Be linked to specific and measurable **surface processes** (e.g. biophysical parameter such as leaf area index (LAI), biomass, absorbed photosynthetically active radiation (APAR, etc.)) i.e. be related to a measurable parameter or process

Source: Jenson (RSE Book, 2000)

Use of ratio to reduce topographic effects

Example 1

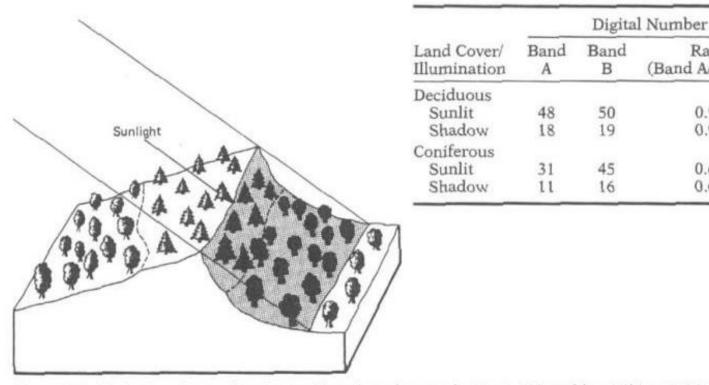


Figure 7.25 Reduction of scene illumination effects through spectral ratioing. (Adapted from Sabins, 1997.)

NB. The objective is to map 2 classes –coniferous and deciduous forest

Ratio

(Band A/Band B)

0.96

0.95


0.69

0.69

Use of indices to reduce topographic effects

Example 2 from Kabul

False color composite (FCC)

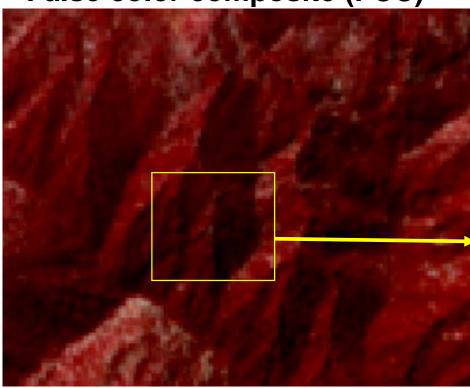


R: 703

NIR: 1502

R:480

NIR:1018


Normalized difference vegetation indices (NDVI)

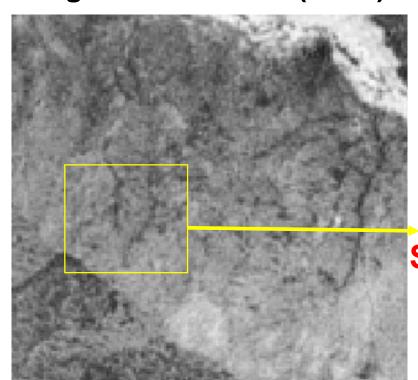

Sunlit: 0.36 Shaded:0.359

R and NIR represents the reflectance in red and near infra-red band of Sentinel for SUNLIT and SHADED region and their respective ratio in NDVI image

- ➤ Enhances green vegetation so that plants appear distinct from other image features
- Reflectance of light spectra from plants changes with plant type, water content within tissues, and other intrinsic factors
- Vegetation reflectance is determined by chemical and morphological characteristics of the surface of organs or leaves e.g. leaf structure, leaf pigments etc.

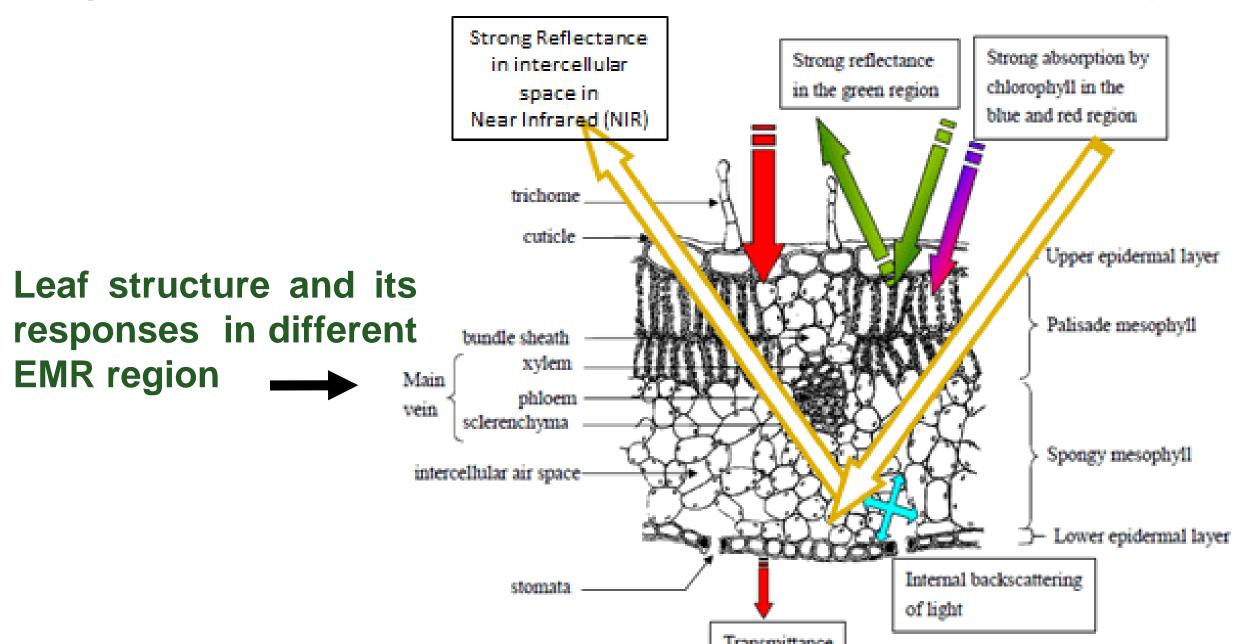

Simple Difference Vegetation Index

DVI = NIR-R (*Richardson et al., 1977*)


- Distinguishes between soil and vegetation
- Does Not deal with the atmospheric effects

Ratio-based Vegetation Index

RVI = R/NIR (Jordan 1969)


- Reduces the effects of atmosphere and topography
- Low for soil, ice, water, etc.

DVI

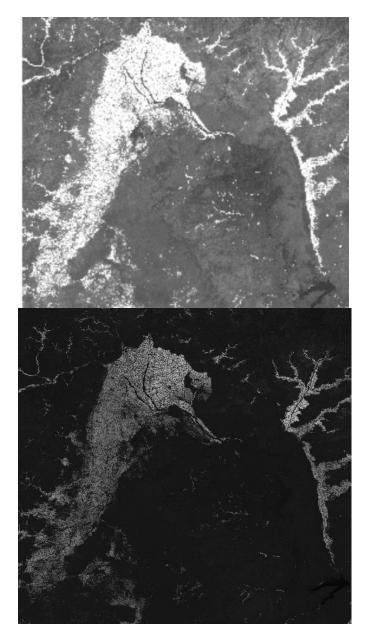


RVI

- ❖ Normalized Difference Vegetation VEGETATION REFL Index
- Standard method for comparing the vegetation greenness from satellite
- \rightarrow NDVI = (NIR)-(RED)/(NIR)+ (RED)
- Explains density of vegetation
- ➤ The NDVI values tentatively ranges between -1 to +1, the values close to +1 denotes the good health of vegetation










NDVI is sensitive to the effects of soil and atmosphere and saturates at high density of vegetation

NDVI

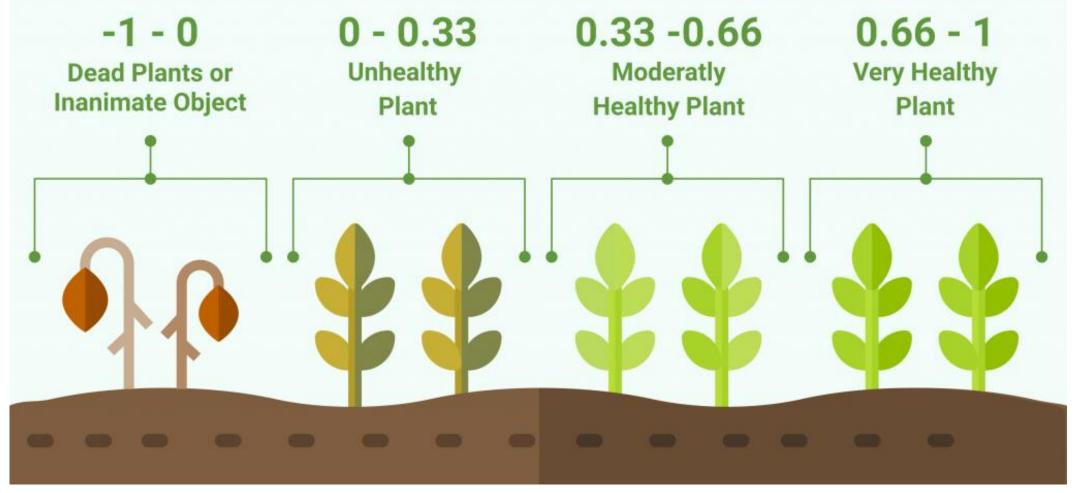

- Negative values correspond to areas with water surfaces, manmade structures, rocks, clouds, snow;
- > Plants will always have positive values between **0.2 and 1.**

Soil Adjusted Vegetation Index

- ➤ The concept of distinction of vegetation from the **soil background** was proposed by *Richardson and Wiegand.*, 1977
- Soil background conditions exert considerable influence on partial canopy spectra and the calculated vegetation indices

❖ SAVI = ((NIR – Red) / (NIR + Red + L)) x (1 + L) Huete, 1988

- > Minimizes soil brightness influence
- ➤ L is a variable ranges within -1 to 1, depending on the amount of green vegetation present in the area
- ➤ To run the remote sensing analysis of areas with high green vegetation, L is set to be zero (in which case SAVI index data will be equal to NDVI); whereas low green vegetation regions require L=1

- ❖ Atmospherically Resistant Vegetation Index (ARVI; Kaufman and Tanré, 1992)
- > Relatively prone to atmospheric factors (such as aerosol)
- > Atmosphere affects significantly **Red** region compared to the **NIR**
- > Corrected for atmospheric scattering effects in the red reflectance spectrum by using the measurements in blue wavelengths.

ARVI = (NIR - (2 * Red) + Blue) / (NIR + (2 * Red) + Blue)

- Eliminates the effect of atmospheric aerosols
- Monitoring tool for tropical mountainous regions often polluted by soot coming from slash-and-burn agriculture


❖ Land Surface Water Index (LSWI)

NIR-SWIR/NIR+SWIR

LSWI is sensitive to changes in vegetation canopy water content and indicates the water stress

❖ Vegetation Condition Index (VCI)
(NDVI-NDVI_{min}/NDVI_{max}- NDVI_{min})*100
Lower and higher values indicate had a

Lower and higher values indicate bad and good vegetation state conditions

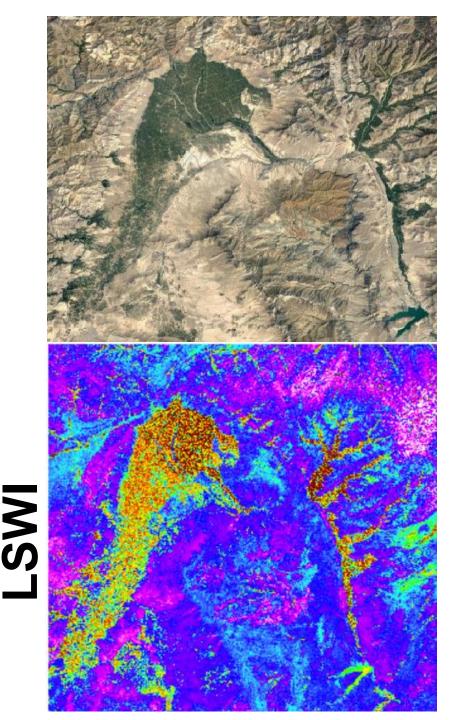


Water indices

- > Used to highlight the water bodies while suppressing the other land cover
- Water absorbs more energy (low reflectance) in NIR and SWIR wavelengths
- > Have the greatest reflectance in the blue portion of the visible spectrum
- ➤ Clear water has high absorption and virtually no reflectance in near infrared wavelengths range and beyond

Factors affecting water

- > Algae: Water with higher algal density reflect more in green bands
- Turbidity: Turbid water has a higher reflectance in the visible region than clear water. This is also true for waters containing high chlorophyll concentrations


Water indices

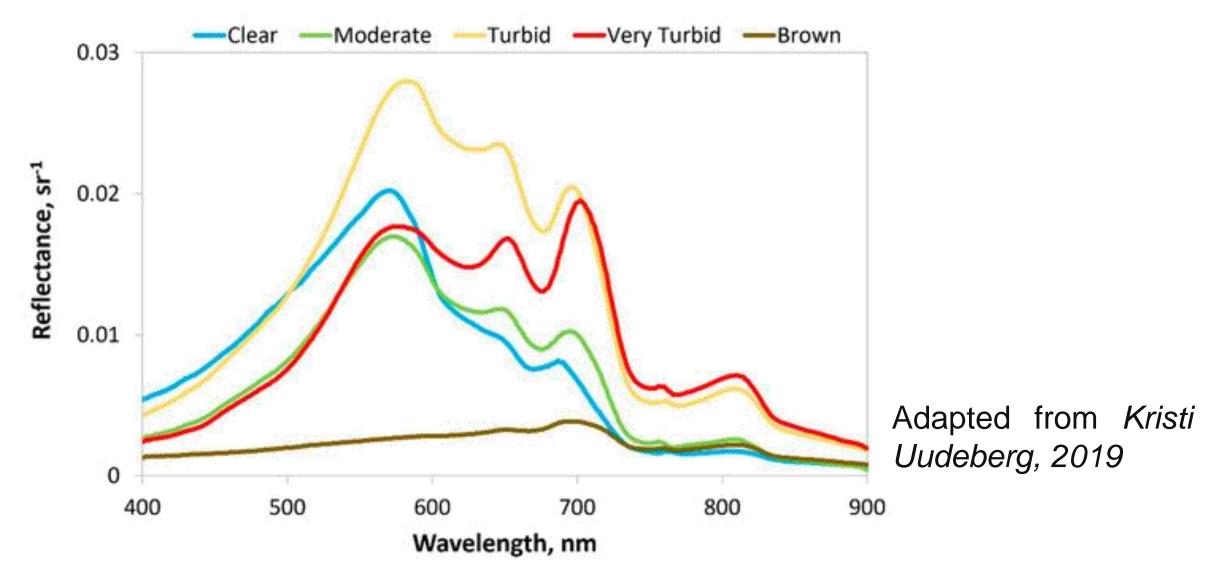


Reflectance response of water with different levels of turbidity

Snow indices

- Ice and snow generally have high reflectance across all visible wavelengths, thus bright white appearance
- The low reflection of ice and snow in the SWIR is related to their microscopic liquid water content

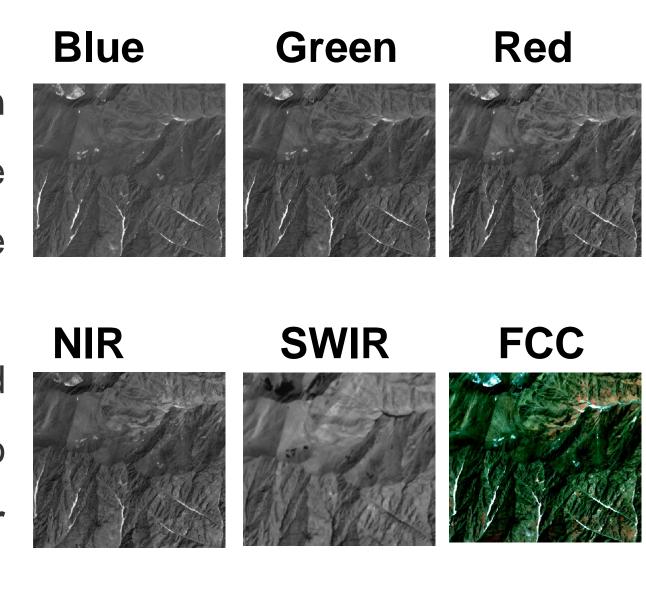

Snow indices

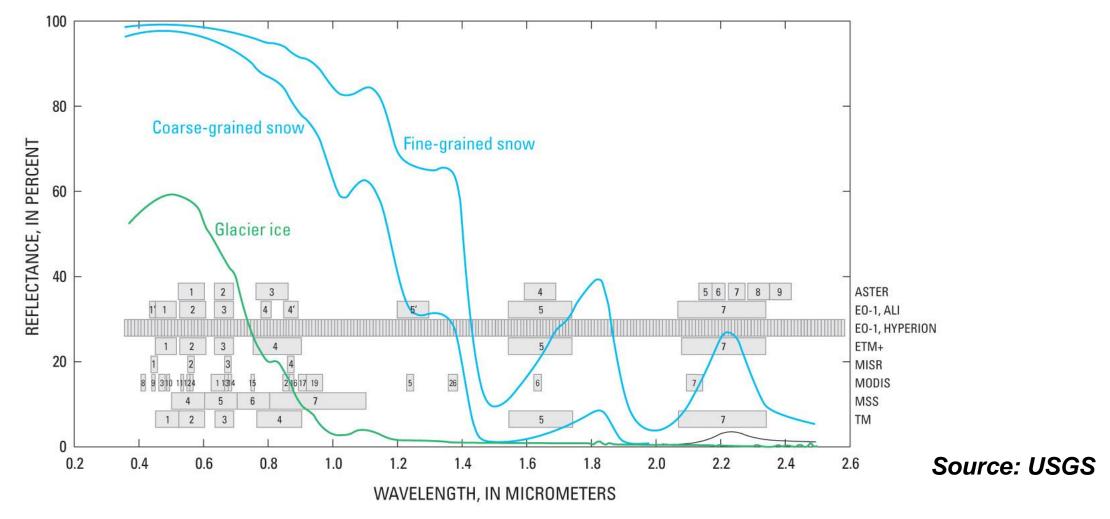

Spectral reflectance curves of bare glacier ice, coarse-grained snow, and fine-grained snow. Spectral bands of selected sensor on Earth-orbiting satellites are shown in gray. The numbers in the gray boxes refer to the associated band numbers of each sensor

Water and snow indices

Indices	Formula
Normalized Difference Water Index (NDWI)	GREEN-NIR/GREEN+NIR
Modified Normalized Difference Water Index (MNDWI)	GREEN-SWIR/GREEN+SWIR
Normalized Difference Pond Index (NDPI)	MIR-GREEN/MIR+GREEN
Water Ration Index (WRI)	GREEN+RED/NIR+SWIR
	DED ODEEN/DED ODEEN
Normalized Difference Turbidity Index (NDTI)	RED-GREEN/RED+GREEN 4*(GREEN-SWIR2-
Automated Water Extraction Index (AWEI)	0.25*NIR+2.75*SWIR1
Normalized Difference Snow Index (NDSI)	GREEN-SWIR/GREEN+SWIR
Normalized Difference Snow and Ice Index (NDSII-1)	RED-SWIR/RED+SWIR
	GREEN (NIR-SWIR)/
Snow Water Index (SWI)	(GREEN+NIR)(NIR+SWIR)


Applications

- Vegetation mapping and monitoring
- Biodiversity assessment
- > Estimation of biophysical parameters (LAI, fPAR)
- Phenological assessment
- Vegetation health/stress
- > Forest degradation
- Biomass mapping and modelling
- Productivity and carbon assessment
- Crop condition monitoring and predicting crop yield


Index	Wavebands	Application			
Ratio	$R_{\rm NIR}/R_{\rm red}$	Biomass, LAI, cover			
Normalized D	ifference Vegetative Indices	450			
Red NDVI	$(R_{\rm NIR}-R_{\rm red})/(R_{\rm NIR}+R_{\rm red})$	LAI, Intercepted PAR			
Green NDVI	$(R_{NIR} - R_{green})/(R_{NIR} + R_{green})$	LAI, Intercepted PAR			
Red Edge NDVI	$(R_{\rm NIR} - R_{\rm red~edge})/(R_{\rm NIR} + R_{\rm red~edge})$	LAI, Intercepted PA			
Soil Adjusted	Vegetation Index	·			
SAVI	$(R_{NIR} - R_{red})(1 + L)/(R_{NIR} + R_{red} + L)$	LAI			
Enhanced Veg		\$			
EVI	$2.5(R_{NIR} - R_{red})/(R_{NIR} + 6R_{red} - 7.5R_{blue} + 1)$	LAI			
Normalized Pi	gment Chlorophyll Ratio Index	80			
NPCI	$(Red_{660} - Blue_{460})/(Red_{660} + Blue_{460})$	Leaf chlorophyll			
Chlorophyll In	dices				
CIgreen	$(R_{NIR}/R_{green}) - 1$	Leaf chlorophyll			
CI _{red edge}	$(R_{NIR}/R_{red\ edge}) - 1$	Leaf chlorophyll			
Plant Senescer	nce Reflectance Index	\$4 13/0V 50V			
PSRI	(Red ₆₆₀ - Green ₅₁₀)/NIR ₇₆₀	Plant senescence			

Source: Hatfield and Prueger (2010)

Leaf area index (LAI) estimation

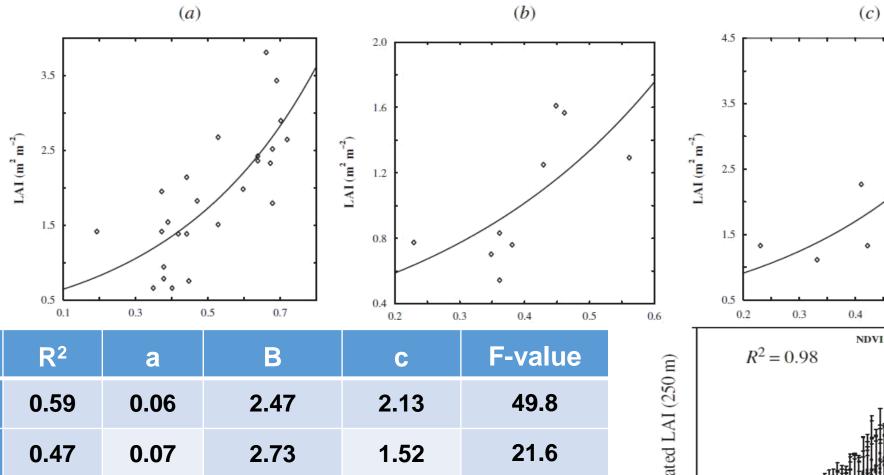


Plantation	R ²	a	В	C	F-value
a) Mixed	0.59	0.06	2.47	2.13	49.8
b) Eucalyptus	0.47	0.07	2.73	1.52	21.6
c) Poplar	0.46	0.05	3.13	2.26	20.4
d) All plantation	0.62	0.05	2.73	2.01	63.3



0.5

0.6

Source: Tripathi et al., 2014

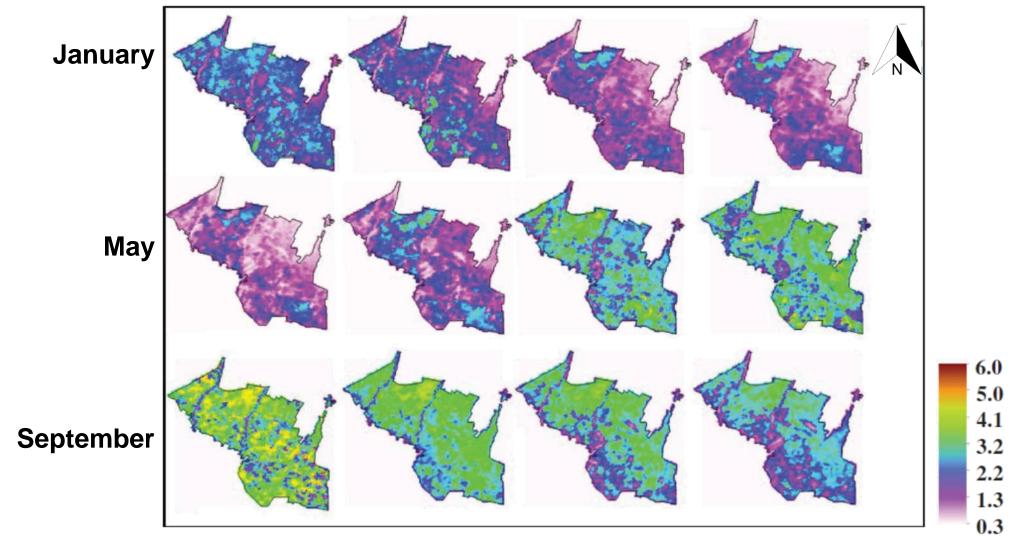


Monthly pattern (January- December) of leaf area index (LAI) derived from NDVI (exponential relationship)

Biomass estimation

	AGB (t/ha)	CC (%)		
AGB (t/ha)	1			
CC (%)	0.83	1		
NDVI	0.85	0.95		
EVI	0.75	0.91		
SR	0.86	0.96		
SAVI	0.70	0.84		

Correlation between above ground biomass and vegetation indices for *Quercus rotundifolia*

Source: Macedo et al., 2018, southern Portugal

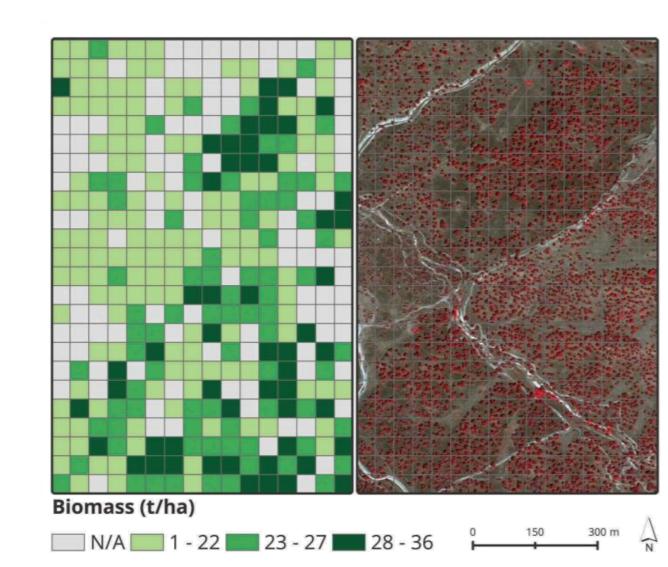


Drought Assessment

TABLE 1.


Remote sensing data, indices and thresholds relevant to drought assessment used in the study.

Drought index		Band or index used to compute the index		Range	Normal condition	Severe drought	Healthy vegetation
		AVHRR	MODIS				
1.	Normalized	Band 1	Band 1	-1 to +1	Depends on		
	difference vegetation index	(0.58-0.68µm)	(0.62-0.67µm)		the location	-1	+1
	(NDVI)	Band 2	Band 2				
		(0.73-1.10µm)	(0.84-0.87µm)				
2.	Drought severity	NDVI	NDVI	-1 to +1	0	-1	+1
	index (DEV _{NDVI})	NDVI long-term mean	NDVI long-term mean				
3.	Vegetation	NDVI	NDVI	0 to 100 %	50 %	0%	100%
	condition index (VCI)	NDVI long-term minimum	NDVI long-term minimum				
		NDVI long-term maximum	NDVI long-term maximum		Source:	Thenkabail	and Gamage, 20

Southwest Asia NDVI deviation

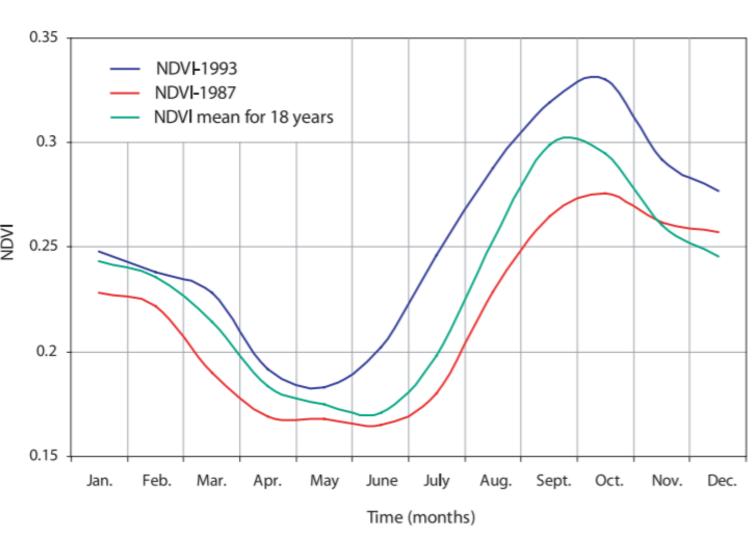

Source: Thenkabail and Gamage, 2004

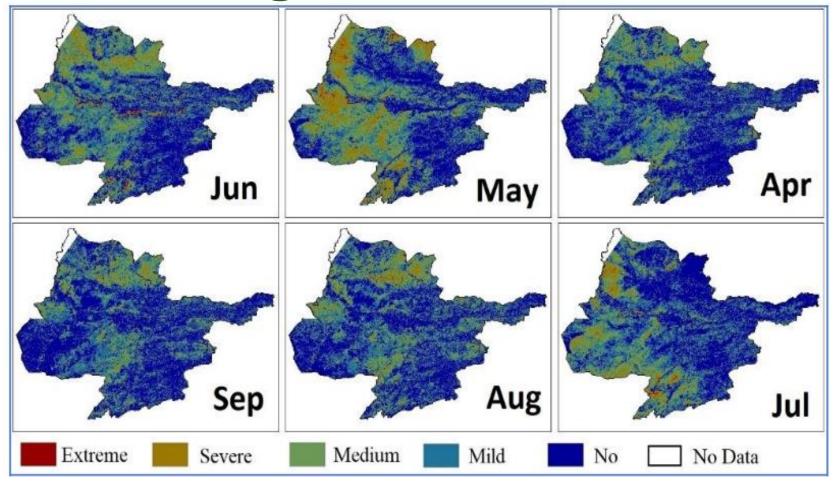

Monthly median of drought condition in Herat province during vegetation seasons of 2003-2014 based on VCI


Source: Mohammad Ehsan Razipoor, 2019

http://www.fao.org/giews/earthobservation/asis/index_2.jsp?lang=en


Application of water and snow indices

- Water mapping and monitoring
- Change detection
- Water quality assessment
- Flood monitoring and damage assessment
- Algae assessment
- > Snow and ice mapping and monitoring


Water mapping

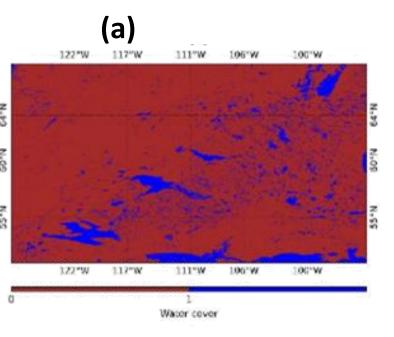

Source: Sharma et al, 2015

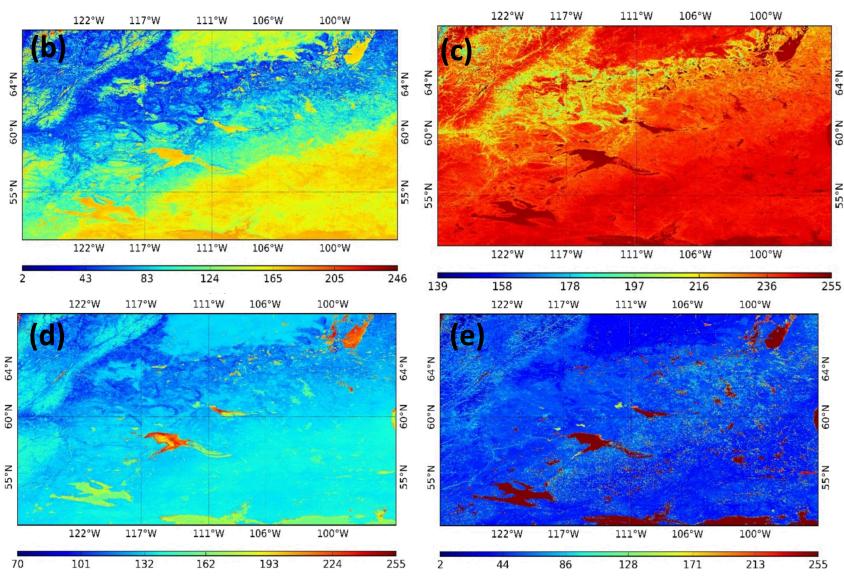


(a) Reference water cover map (b) Automated water extraction index (AWEI), (c) Modified normalized difference water index (MNDWI) (d) Normalized difference water index (NDWI), (e) Superfine water index (SWI)

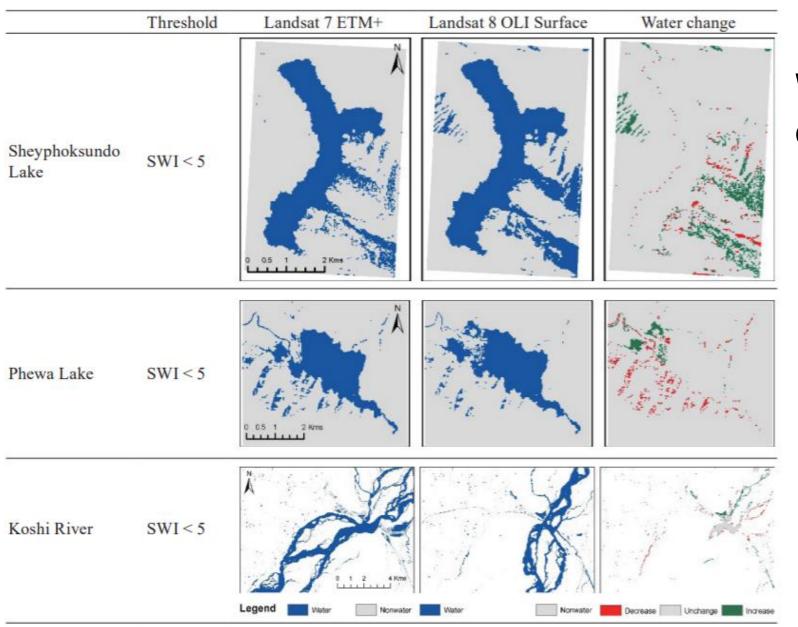

Water mapping and change dynamics

Simple water index (SWI)




Source: Acharya et al., 2019

Water inundation mapping

Minimum and maximum inundation areas and their distributions during each climatological month between 2000 and 2010 for Poyang Lake, China

Source: Feng et al. (2012)

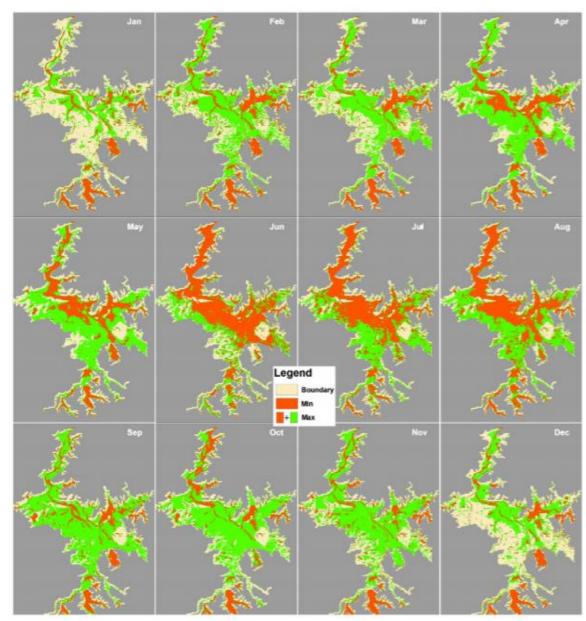

Water quality assessment


Table 3. Correlation coefficient analyses between water quality and spectral indices

Parameter	EC	pН	Nitrate	Nitrite	Silicate	Phosphate	О.М	NDSI	NDVI	NDBI	N/P ratio
EC	1										
pН	0.192	1									
Nitrate	0.106	0.173	1								
Nitrite	0.292	0.144	0.806	1							
Silicate	0.827	0.229	0.46	0.721	1						
Phosphate	-0.016	-0.353	-0.28	-0.069	-0.002	1					
O.M	-0.02	-0.339	-0.086	-0.185	-0.044	-0.03	1				
NDSI	-0.273	0.033	-0.416	-0.517	-0.272	-0.085	0.246	1			
NDVI	0.273	-0.033	0.416	0.517	0.272	0.085	-0.246	-1	1		
NDBI	-0.355	-0.006	-0.332	-0.516	-0.392	0.032	0.488	0.744	-0.744	1	
N/P ratio	-0.221	0.329	0.897	0.738	0.334	-0.171	-0.096	-0.345	0.345	-0.135	1.000


Source: Ahmed M. El-Zeiny, 2018

Flood hotspot analysis


International Water Management Institute project

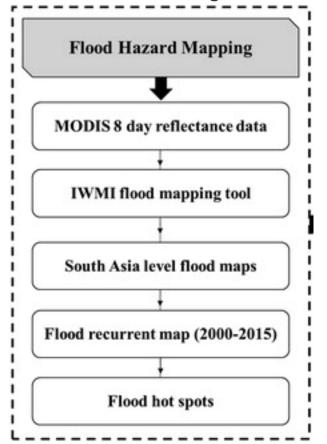

Source: Matheswaran et al, 2018

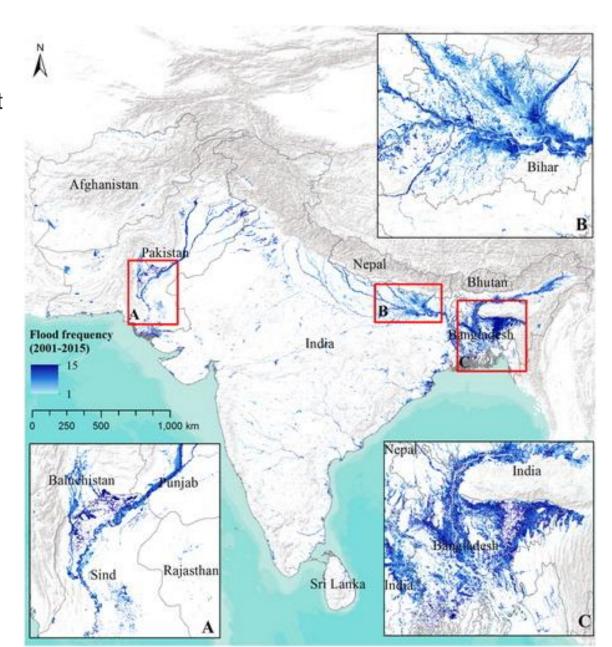

Application of snow indices

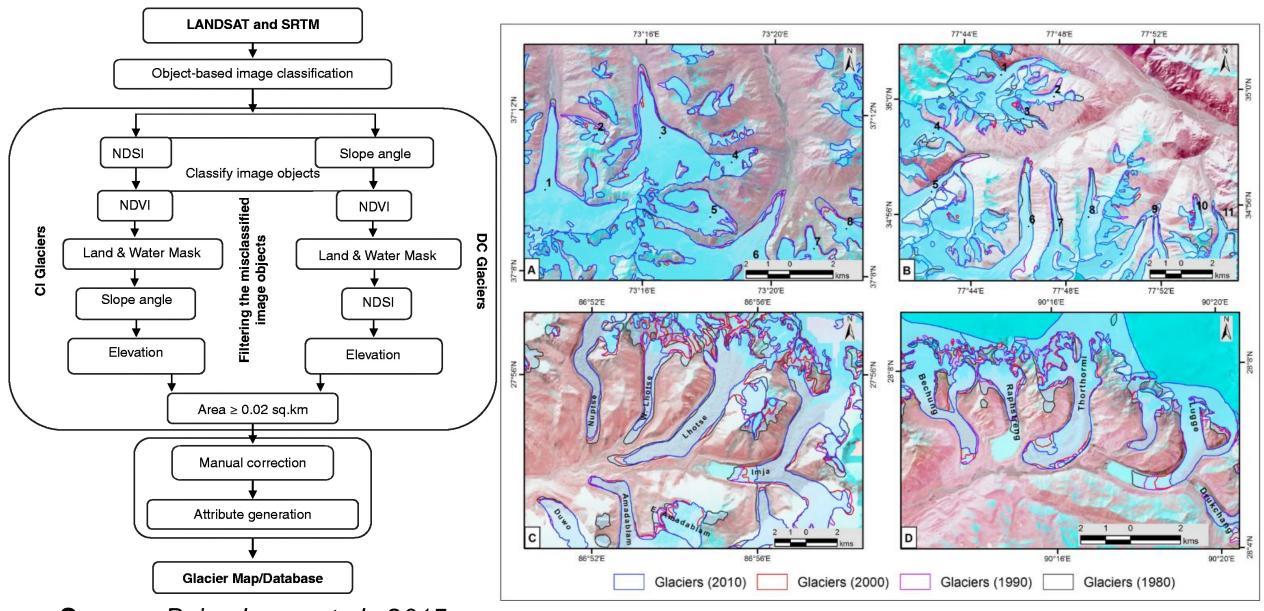

Source: Bajracharya et al., 2015

